
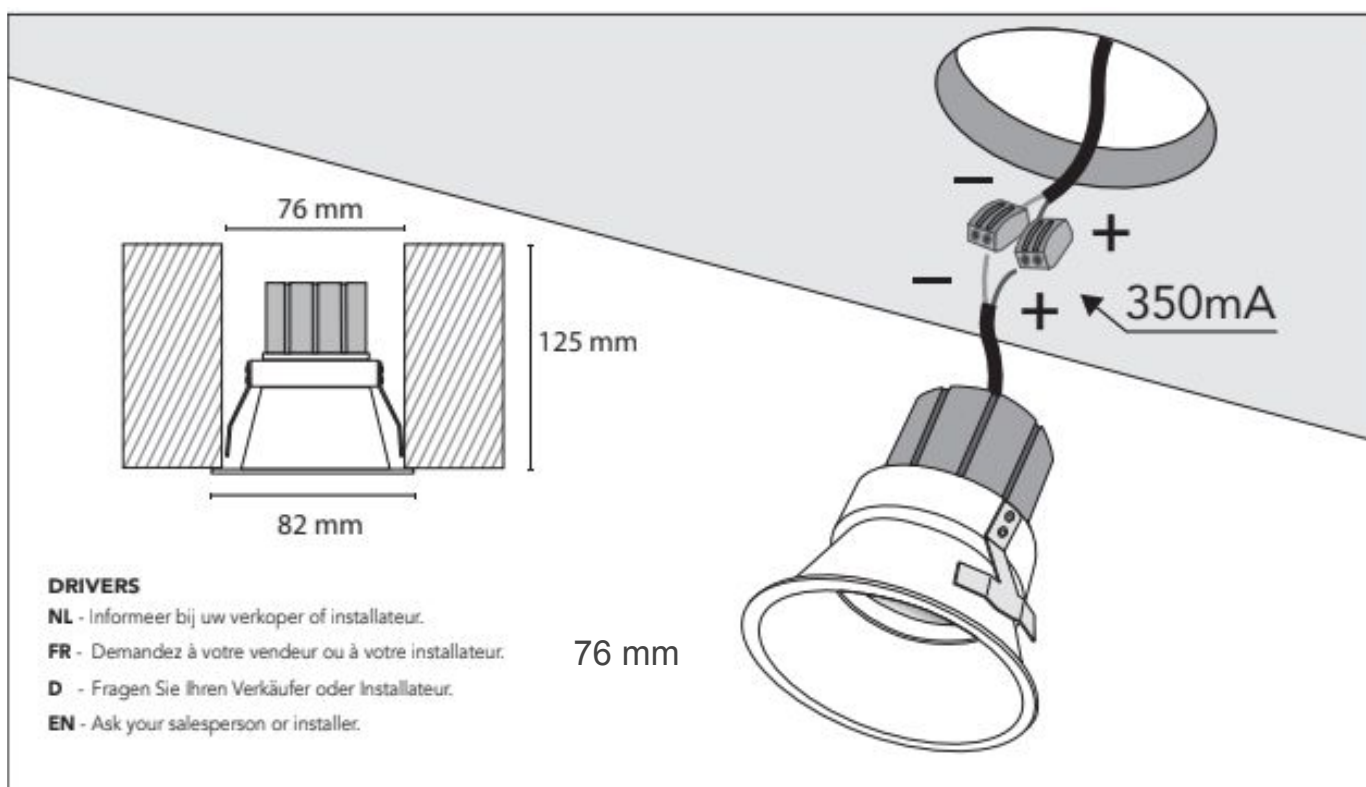
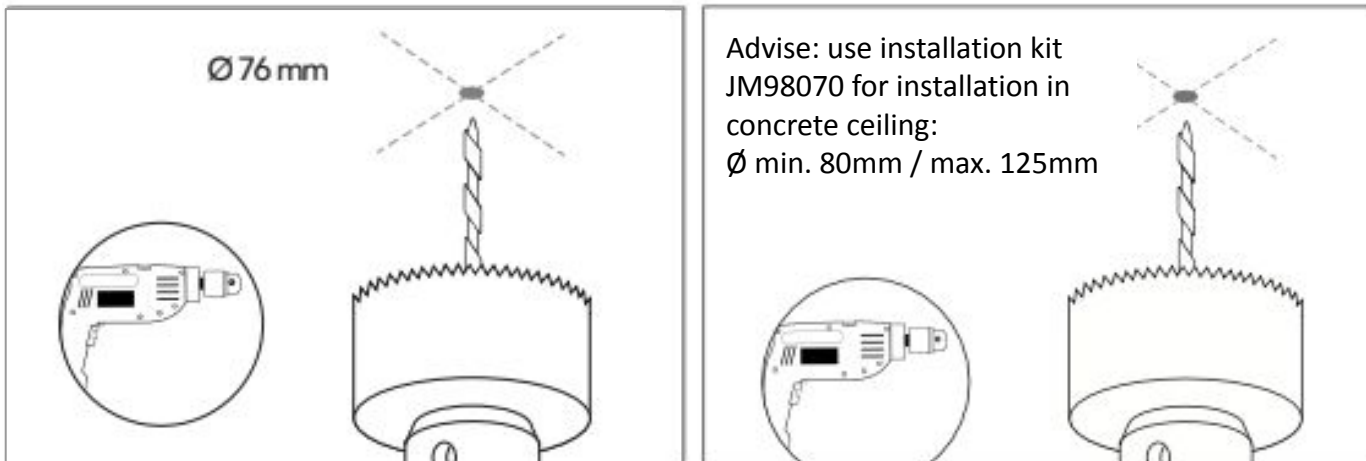



FLAVO LED RECESSED

JM1219X2

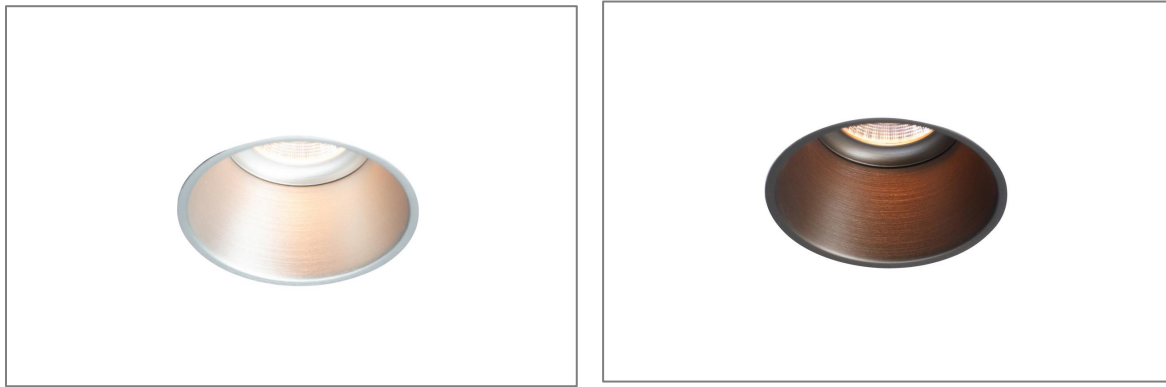

Cutout shape / size : 

Ceiling compatibility for wood / plasterboard : 75mm
 Ceiling compatibility for concrete* : 75mm
 *We advise to use installation kit JM98070 □ min. 80mm / max 125mm

Recessed depth :

125mm

Available colors :

White → code 0
 Champagne ano → code 4
 Bronze ano → code 6
 Black ano → code 8

Specifications :

Non adjustable
 AC220-240V, 50/60Hz
 1x LED 6,8W
 CRI 90
 Dim-to-warm 2700-1800K / 600lm
 Reflector 36°
 Dimmable LED power supply 350mA excl.
 Class: III

Light output (lm): 695-470lm

Weight: 0,3kg

Advised power supply:

Direct current dimmable (trailing edge-leading edge):
dim-to-warm
 TCI MICRO MD 350 (code 127040) (LxDxH 94x38x21mm)
 1 spot / 1 driver

Options :

Installation kit JM98070 (for installation in wood and concrete ceiling)